

# HERITAGE CLASSIC ™

Handcrafted Wood Carriage Style Garage Doors



### Heritage Classic, Handcrafted by Northwest Door



Heritage Classic's are hand-crafted overhead sectional wooden garage doors that replicate old-fashioned swing-type doors. Northwest Door takes great pride in manufacturing these fine garage doors and has over seventy years experience. Similar looking doors are available from other manufacturers, however there is no substitute for the Heritage Classic's superior quality and craftsmanship.


#### Unique features:

- · Heavy-duty wood frame
- Unlimited sizes
- 3-section design
- · Custom arches
- Exterior grade plywood door skins are pressure laminated to both sides of the door frame
- Wood overlay is relief cut and has a 7° taper at section joints
- Water break at base of door beneath overlay
- Commercial grade industrial torsion spring hardware
- · Each door section supplied with a steel strut for maximum reinforcement
- Frequently spaced intermediate hinges
- Double end hinges
- Threaded inserts for securing hardware
- Aluminum retainer with vinyl boot-type bottom weather seal
- Skilled artisans build every Heritage Classic door with pride using fine quality materials and personally sign each door they create. Our craftsmen have an average of more than 10 years of experience.




#### Construction


#### E Series




Overall Thickness, Nominal 2-1/4"



#### C Series



Overall Thickness, Nominal 2-7/8"



- A Heavy-Duty nominal 1-1/8" thick Hem/Fir frame
- B Nominal 1-1/8" Polystyrene (EPS) insulation
- C Tongue & Groove section joints
- D (Back) Nominal 1/4" exterior grade plywood pressure laminated to frame with waterproof contact adhesive (Luan standard)
- \* E (Front) Nominal 1/4" exterior grade plywood pressure laminated to frame with waterproof contact adhesive (Luan standard)
- \*\* F (C-Series Only) 1x6 T&G wood applied vertically to the door face using Marine Grade urethane adhesive and toe nailed with stainless steel fasteners. (Western Red Cedar or Meranti standard)
- \*\*\* G Nominal 5/8" wood overlay, relief cut to resist twisting or warping then adhered to the door face with waterproof adhesive and stainless steel pin nails. Pin nail holes are filled with putty and sanded smooth on paint grade doors, stain grade doors are not filled. (Western Red Cedar or Meranti standard)
  - H 7° taper on overlay at section joints
  - I Nominal 3/8" removable wood window stop (material to match overlay material)
- \*\*\*\* J True-Divided Lites (1/8" clear annealed glass standard)
  - \* Note: Optional 3/8" exterior grade rough sawn Okume plywood, 3/8" MDO Fir plywood (paint only) (with or without grooves) plus other optional plywood
  - \*\* Note: Optional 1x4, 1x6, 1x8 T&G VG Fir, Tight Knot Cedar, 1/2" Extira® exterior wood composite plus other optional woods
- \*\*\* Note: Optional VG Fir, Tight Knot Cedar, 1/2" Extira® exterior wood composite plus other optional woods
- \*\*\*\* Note: Optional obscure, tinted or insulated glass

### **Door Operation Types**

Heritage Classic doors can be constructed for different types of operation:

- Sectional, Overhead (Standard) Operational Hardware Included
- One Piece, Overhead or Sliding (Optional) Operational Hardware not included
- Bi-Parting, Swinging Type or Sliding (Optional) Operational Hardware not included







Sectional (Standard)

One Piece

Bi-Parting


### Overlay Profiles



Standard overlay sizes: Top Rail and End Stiles, 1x6 (5-1/2" finished), Bottom and Intermediate Rail, 1x8 (7-1/2" Finished).

5 overlay profiles are available:

- (A) 7/16" Radius (Standard)
- (B) Square Edge
- (C) Eased Edge
- (D) Bevel Edge, 30-35°
- (E) \*Chamfer Edge, 3/8"x3/8" 45°.



\*Note: Full Chamfer and Partial Chamfer available, Partial Chamfer is held back 2" from corners.

#### **Door Arches**



15'-0" Radius (Standard)



Double Car Door, Two 15'-0" Radius Arches (Standard)



Double Car Door, 58'-0" Radius Arch

## C-Series Face Material Sizes, Profiles and Configurations - 1x6 V-Groove T&G Shown

T&G Face Material, is available in 1x4,1x6 (Standard) or 1x8, in 4 profiles and applied in 7 various configurations.

#### T&G profiles:

- (1) V-Groove (Standard)
- (2) Butt-Joint
- (3) Beadboard
- (4) Double Beadboard



Vertical (Standard)




Horizontal



Diagonal A Pattern, 45°



Diagonal V Pattern, 45°



Herringbone A Pattern, 45°



Herringbone V Pattern, 45°



Diamond Pattern, 45°

### **Wood Types**

#### WOOD OVERLAYS

The standard wood used on the overlay on Heritage Classic E and C Series and the face material on C Series is your choice of Western Red Cedar or Meranti. In addition a wide selection of other fine woods are available such as VG Fir, Redwood, Tight Knot Cedar, Alder and other specialty woods upon request. 1/2" Extira® exterior grade wood composite is also available however it is paint grade only.

#### **PLYWOODS**

All plywood used on Heritage Classic E and C Series doors is Exterior Grade. Luan plywood is standard for smooth surfaces and Okume plywood for rough sawn surfaces. 3/8" MDO Fir plywood is also available however it is paint grade only.

#### WOOD DOOR FRAMES

Wood door frames are manufactured using kiln dried Western Hemlock and/or Douglas Fir. We refer to these woods as Hem/Fir as one or both woods may be used. These woods are grown and harvested from forests that follow Sustainable Forest Practices.



### Wood Finishing

When properly finished and maintained a Heritage Classic garage door will remain beautiful and give you many years of service. Finishing instructions and complete warranty information can be found on our website at www.NorthwestDoor.com. For best results we recommend using a quality professional wood finisher to finish your garage door.

Note: At no time should your wood garage door be allowed to get wet before a protective finish is applied. Primer without a top coat is not considered a protective finish. All surfaces of the garage door; interior, exterior, sides, edges and meeting rails must have a protective finish prior to installation.



### Hardware Specifications


- Commercial Grade Continuous Angle Mounted Standard Lift Track
  2" Track to 590 lbs 12", 15", 20" or 30" Radius
  3" Track, over 590 lbs 15" Radius
- Oil Tempered Torsion Springs, 10,000 cycle
- Solid Keyed Shaft, 11 Gauge Keyed Tube or 14 Gauge Tube According to Door Weight and/or Size
- One Galvanized Horizontal Strut Per Door Section 2" Struts to 180" Wide Door 3" Struts over 180" Wide
- 14 Gauge Double End Hinges, Intermediate Hinges and Intermediate Half Hinges
- Galvanized Interior Slide Lock
- Galvanized Interior and Exterior Lift Handles

### Hardware Options

- High Cycle Springs
- Reverse Angle Mounting for Steel or Masonry Jambs
- Low Clearance Track and Hardware
- · High Lift Track and Hardware
- Vertical Lift Track and Hardware
- · Follow Roof Pitch Track and Hardware




Powder Coated Hardware, shown below with optional follow the roof slope track and hardware.
 \*Note: Finishes available in Black, Red, Grey, White, Brown and Custom Colors

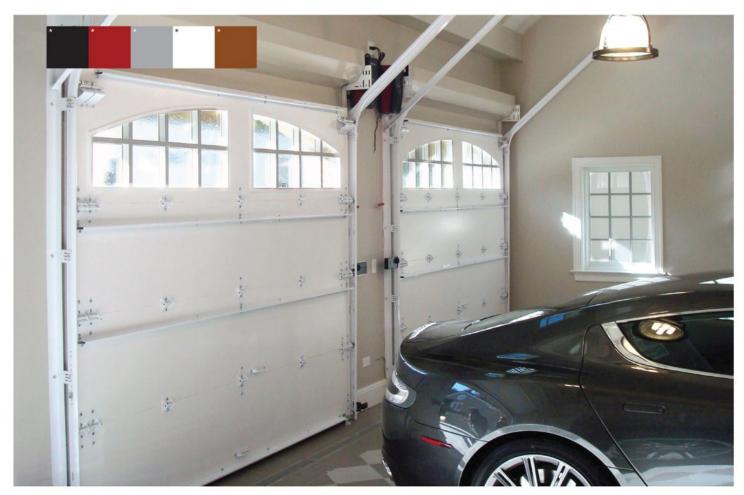


\*Note: The color images shown will vary from actual colors due to the printing process.



## C Series "0" Designs

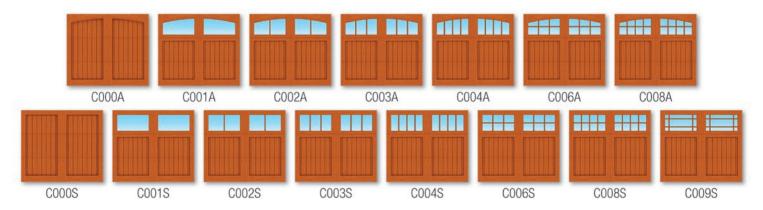

## E Series "0" Designs

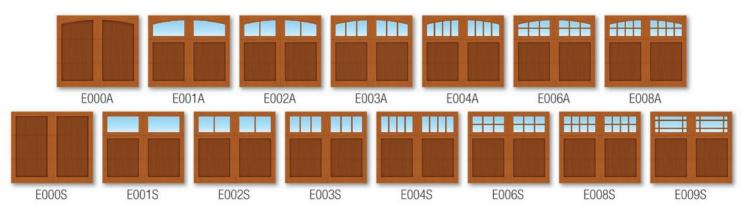



## C Series "1" Designs




E Series "1" Designs





## C Series "2" Designs

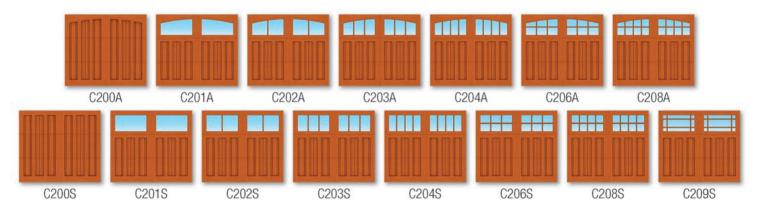

E Series "2" Designs





C Series "3" Designs




E Series "3" Designs






## C Series "X" Designs

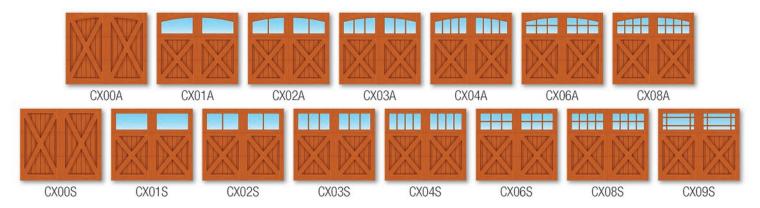

## E Series "X" Designs

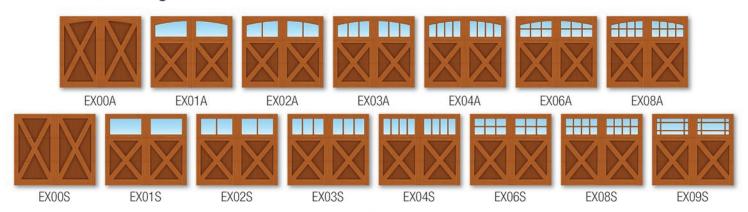




## C Series "A" Designs




## E Series "A" Designs

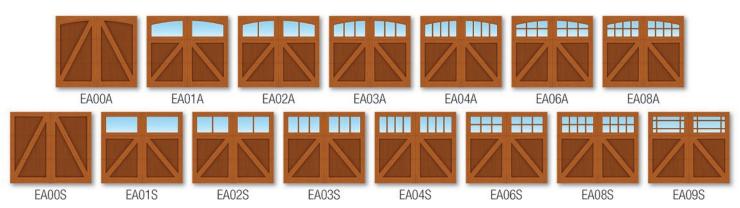

## C Series "V" Designs




## E Series "V" Designs

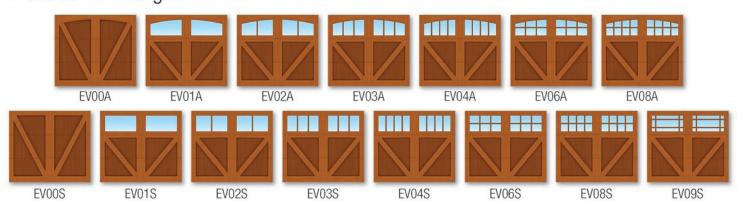


## C Series "M" Designs



## E Series "M" Designs

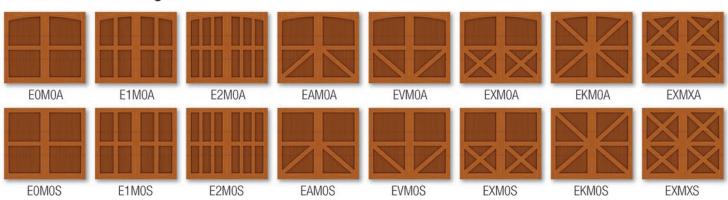

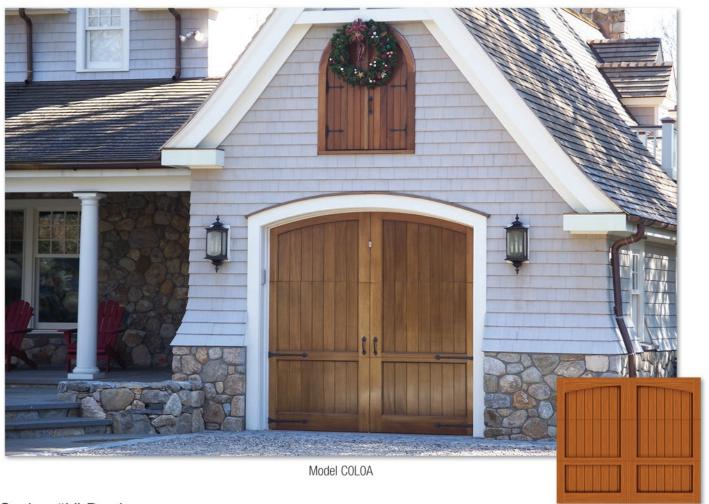

## C Series "L" Designs








## E Series "L" Designs





### Optional Contemporary Designs

Northwest Door also offers wood contemporary design doors. The construction method and materials are the same as that of the Heritage Classic. Please provide your design idea to your Northwest Door Dealer or choose from one of the sample designs below.

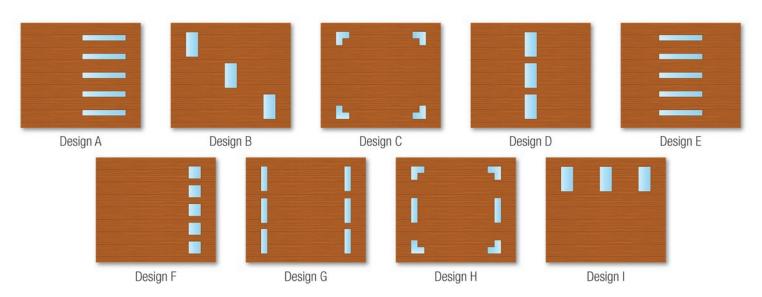

### Glass Options

Windows are available on all door models. Window designs are shown by product on each product's page. 1/8" clear annealed glass is standard. Insulated, tempered, tinted and other specialty glass types are available to suit your particular needs. Additional glass options are available at www.NorthwestDoor.com.



### Optional Decorative Hardware

Decorative hardware can be added to further enhance the appearance of your garage doors, using decorative handles and hinges or decorative handles only. Two Decorative Hardware Kits are available, handles only also available.



Malleable Iron Black Powder Coat Finish



Stamped Steel, Crinkle Textured Black Powder Coat Finish



Decorative Handles and Hinges



Decorative Handles Only

### Garage Door Replacement, A Great Investment!






According to **Remodeling Magazine's Cost vs. Value Annual Report,** year after year, a garage door replacement with upscale garage doors has continued to be one of the highest ROIs (*Return on Investment*) of all exterior remodeling projects.

## **HORMANN** NORTHWEST DOOR

#### a member of the Hörmann group

As one of the world's leading manufacturers of doors we're committed to providing the best quality, value, and selection. Whether residential or commercial; whether steel, aluminum, wood, or high density polystyrene; whether traditional or contemporary; we have the door you're looking for. Each Northwest Door product gives you the perfect array of benefits and optoins with the drive to match.



Hörmann Northwest Door, LLC 19000 Canyon Road East, Puyallup, WA 98375-9746 Phone: 253-375-0700 Fax: 253-375-0800

Email: info@northwestdoor.com www.northwestdoor.com











#### AVAILABLE FROM:

